

NQD-TGS-36 KIT CONTENTS. INSPECTED BY:_____

BASE PLATE- (MINI-04)

DOOR BAR- (MINI-05) STANDARD MINI

HANDLE PIVOT- (MINI-15) STANDARD MINI WITH (USE **TO-05** HANDLE PIVOT EXTENSION)

HANDLE- REARMOUNT ASSEMBLY (**TO-08 AND TO-02**)/TGS-36

DOOR- **NQD-TGS-36**

BRACKETS- (UNINSTALLED/IN HARDWARE KIT)

HARDWARE KIT- CUSTOM, HARDWARE IS INSTALLED ON ANGLE.

(1) **TO-40** TGS-36 BASE MOUNTING ANGLE/(1)**TO-06** MOUNTING BRACKET CLAMP PLATE

(3) 5/16-18 X 1 ½ BOLTS/(6) SAE WASHERS/(3) NYLOCKS

(2) 5/16-18 X 1 BOLTS/(4) 5/16 USS WASHERS/(2) NYLOCKS

(1) ¼-20 X 1 BOLT/(2) SAE WASHERS/(1) NYLOCK

(1) SPRING/(1) SPRING PULLER

LINKAGE- MEDIUM (**NQD-128/129**)

FLIPPER- YES






LIFT CHAIN SHOWN ON OUTSIDE
OF LIFT ARM (AS SHIPPED FROM
FROM TORO)

REMOVE FACTORY DISCHARGE CHUTE




LIFT CHAIN TO BE RELOCATED TO
INSIDE OF LIFT ARM AS SHOWN
FOR CLEARANCE FOR QWIKCHUTE

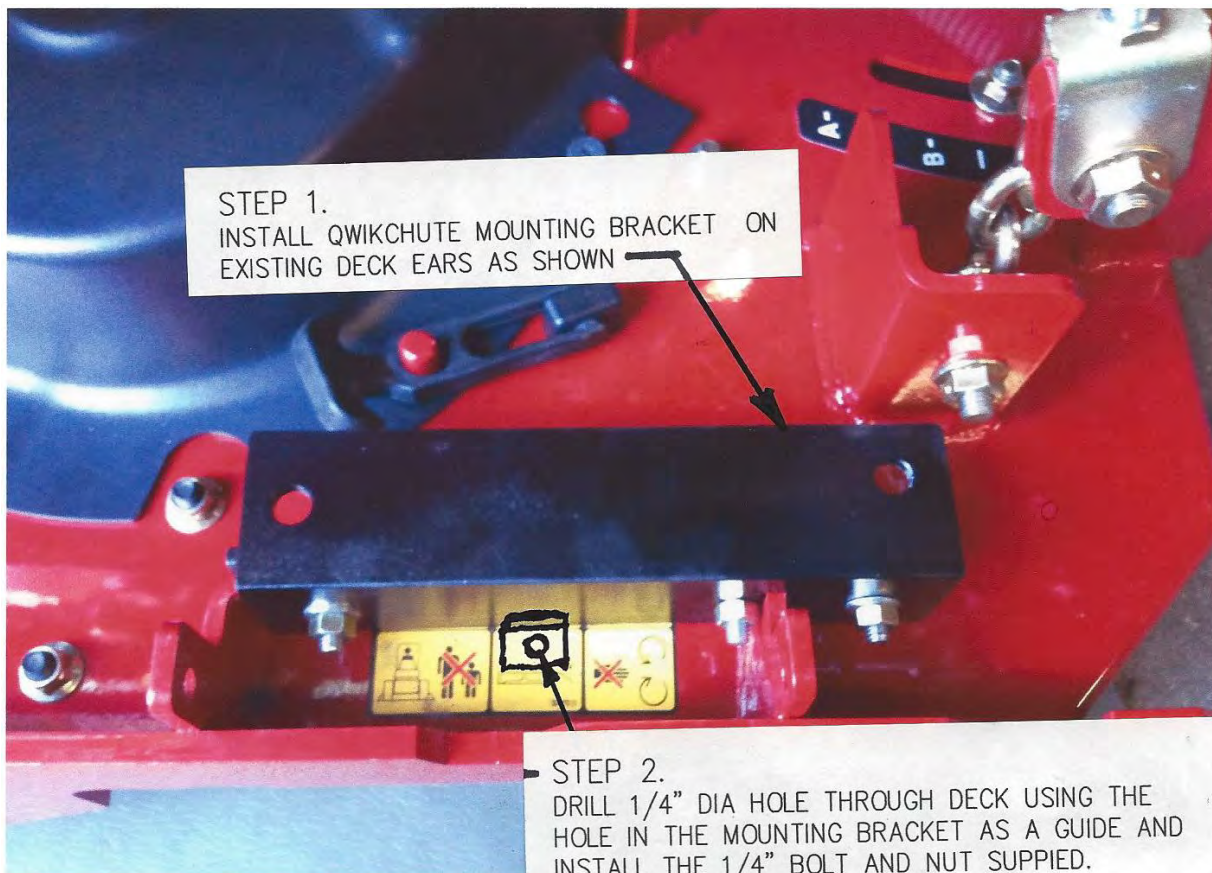

STEP 1.
INSTALL QWIKCHUTE MOUNTING BRACKET ON
EXISTING DECK EARS AS SHOWN

STEP 2.
DRILL 1/4" DIA HOLE THROUGH DECK USING THE
HOLE IN THE MOUNTING BRACKET AS A GUIDE AND
INSTALL THE 1/4" BOLT AND NUT SUPPLIED.

STEP 3.
POSITION QWIKCHUTE ASSEMBLY ON THE MOUNTING BRACKET
AND INSTALL THE TWO SUPPLIED 5/16" BOLTS. QWIKCHUTE
DOOR TO BE CLOSED AND TIGHT AGAINST DISCHARGE FACE
WHEN TIGHTING THE MOUNTING BOLTS.

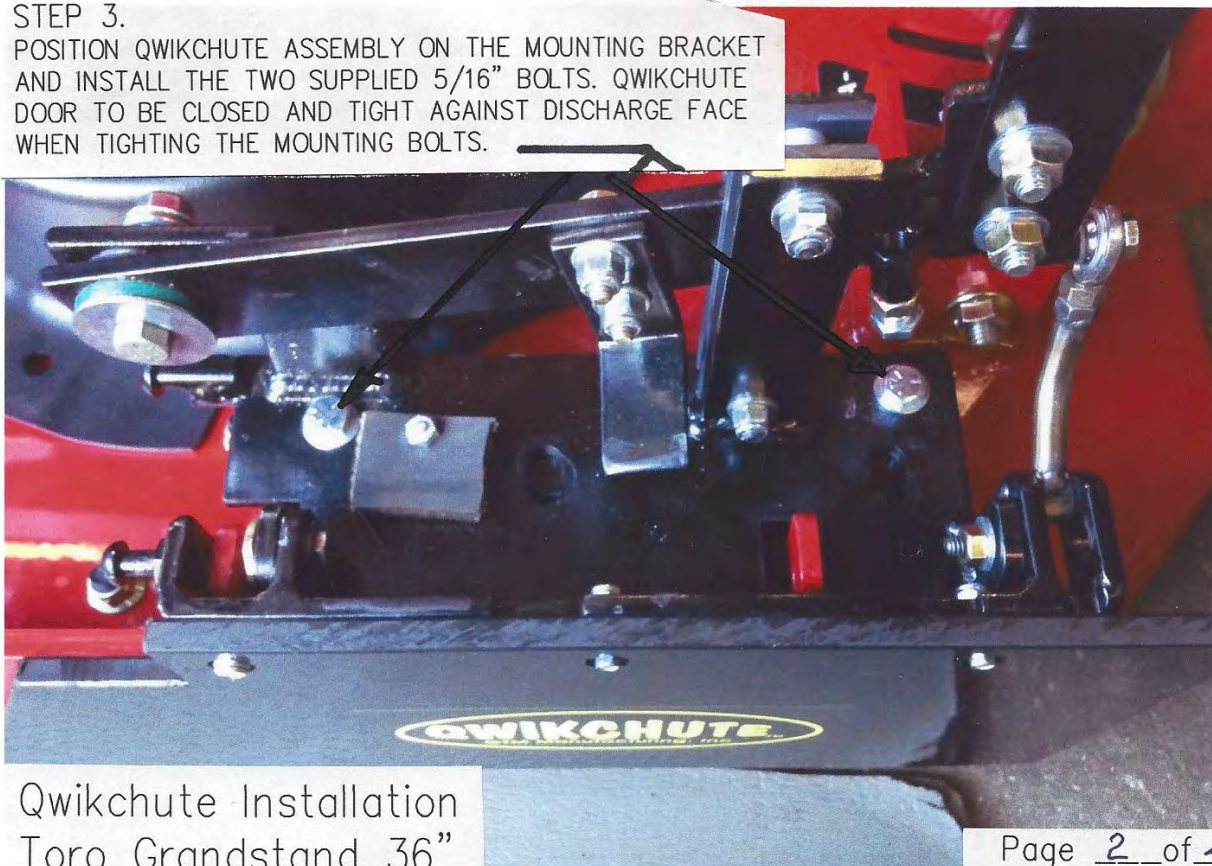

Qwikchute Installation
Toro Grandstand 36"

Page 2 of 4

STEP 1.
MOUNT HANDLE ASSEMBLY TO CONTROL STATION
REMOVE EXISTING BOLT AND REUSE, ADD 5/16"
BOLT (SUPPLIED) THROUGH EXISTING HOLE AND
AND TIGHTEN HARDWARE.



Qwikchute Installation
Toro Grandstand 36"

Page 3 of 4




STEP 1.
INSTALL CONTROL ROD TO HANDLE AND QWIKCHUTE.
PLACE HARDWARE ON STUD IN THIS ORDER. 3/8 SPACER
SMALL WASHER, ROD END, SMALL WASHER AND 3/8 NUT.
TIGHTEN.

STEP 2
INSTALL LINK EXTENSION BAR TO QWIKCHUTE USING 5/16 BOLTS, NUTS
WASHERS, AND 3/8 NUTS AS SPACER AS SHOWN IN PICTURE 4-A. BEFORE
TIGHTENING BOLTS RAISE DECK ALL THE WAY UP WITH QWIKCHUTE
DOOR CLOSED, POSITION LINK EXTENSION BAR SO THAT THE HANDLE IS
ALMOST TO THE STOP ON THE HANDLE PIVOT ASSEMBLY AND TIGHTEN
HARDWARE.

EXTENSION LINK BAR

SEE SPRING
INSTALLATION SHEET



Qwikchute Installation
Toro Grandstand 36"

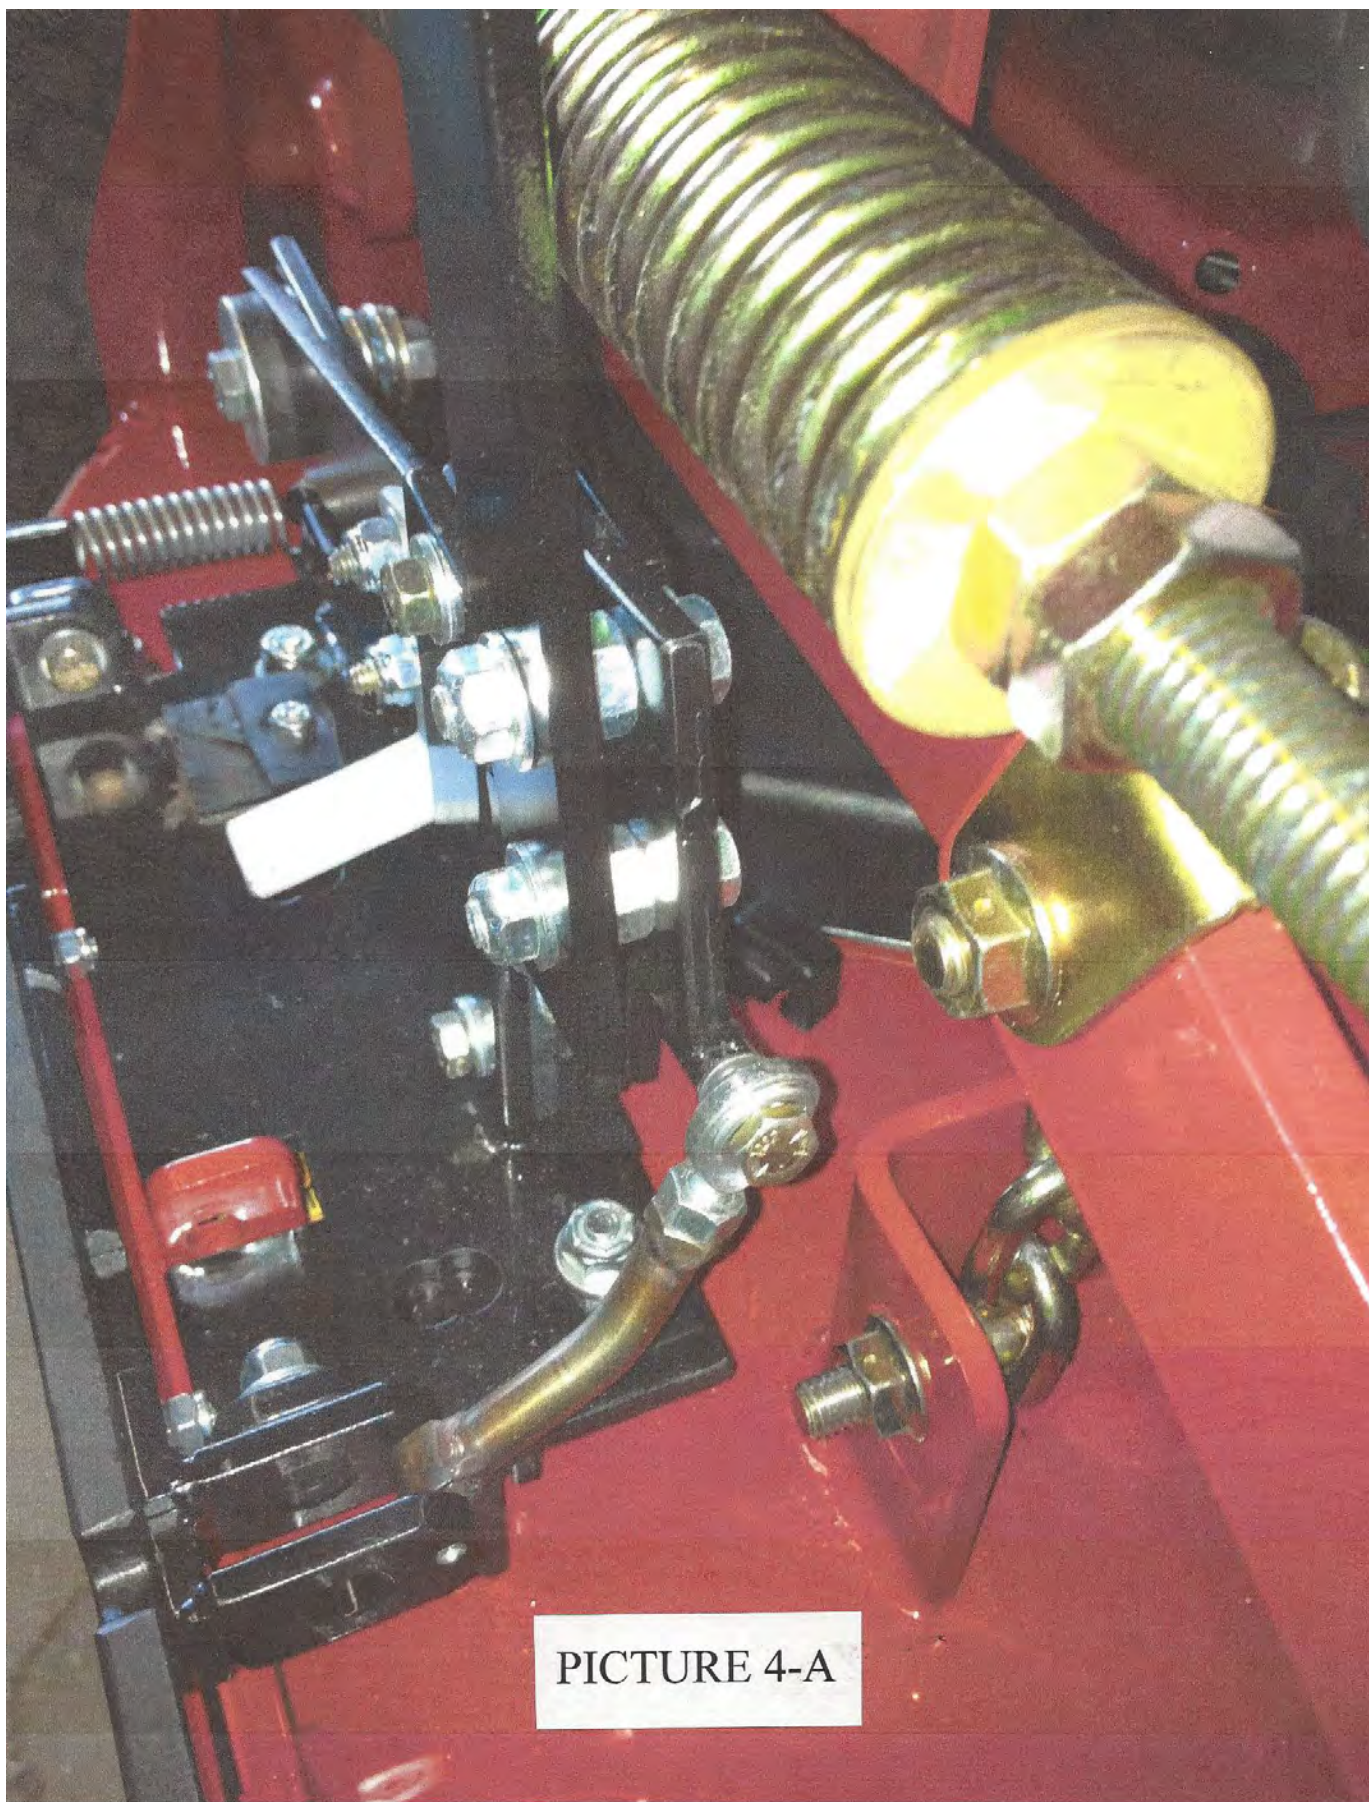

PICTURE 4-A

SPRING INSTALLATION QWIKCHUTE NQD MODEL

STEP 2 LOOP FINGERS OVER SCREWDRIVER
BLADE AND LIFT SPRING ON TO SPRING BOLT
CAUTION --DO NOT OVER STRECH SPRING
DISCARD WIRE LOOP AFTER SPRING IS CONNECTED

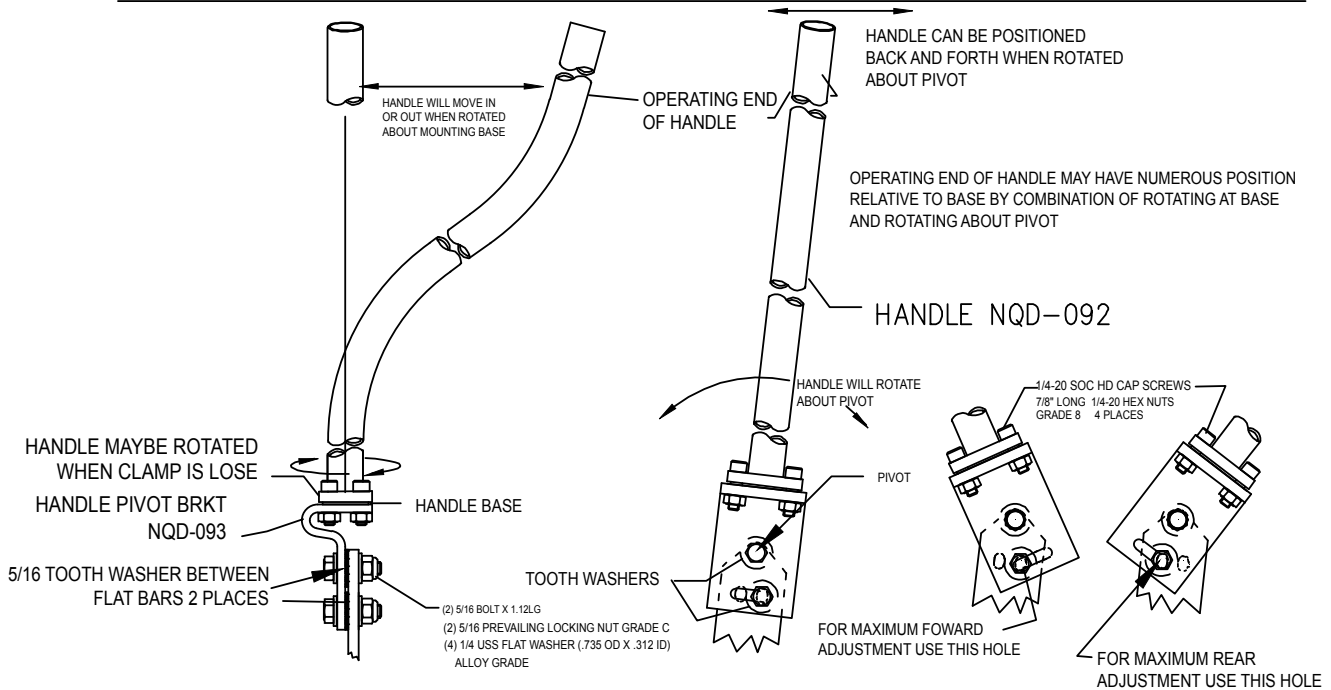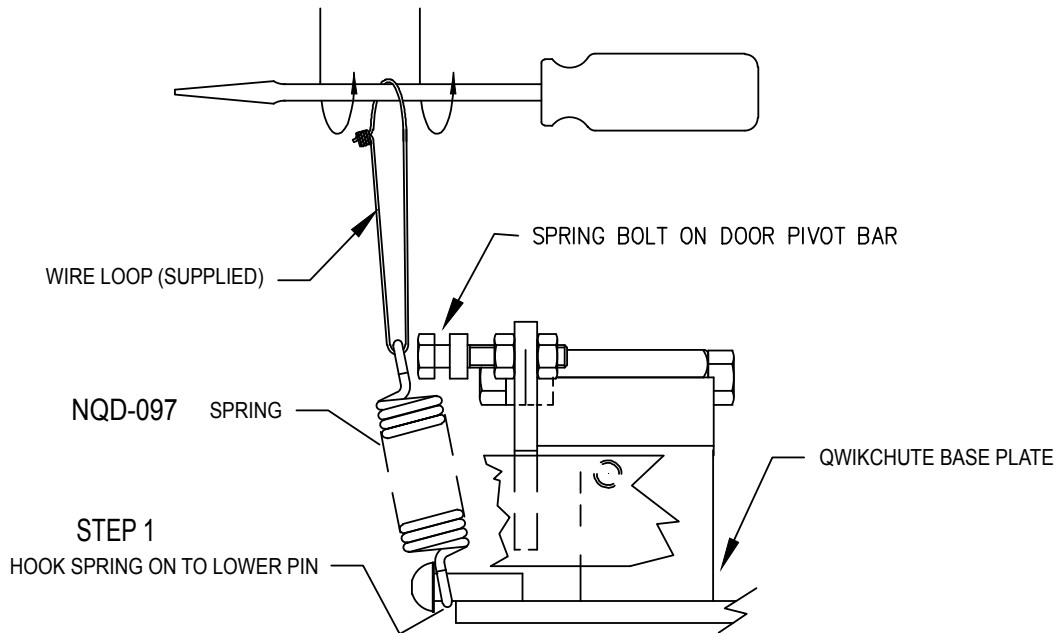

HANDLE INSTALLATION AND ADJUSTMENT

QWIKCHUTE OPERATING PRECEDURE

OPEN FULLY- move handle away from operator quickly.

CLOSE FULLY- move handle toward operator quickly.

PARTIALLY OPEN- from close position move handle away from operator until stay bar swings into postion and release handle. To close from partially open position, quickly open and then close.

(some models do not have partial open feature.)

OIL ALL BEARING POINTS WEEKLY OR AS NEEDED.

WARRANTY

GTM Manufacturing, Inc. products are warranted to the original purchaser to be free from defects in materials and workmanship for a period of 90 days from the date of purchase.

Any part(s) of GTM products found to be defective within the warranty period shall, at GTM's option, be repaired or replaced without charge.

Warranty consideration is obtained by returning any GTM product/part believed to be defective to GTM Manufacturing, Inc. within the applicable warranty period. **Please call for authorization.**

GTM Manufacturing, Inc.

14350 EASTSIDE ST

GROVELAND, FL 34736

(407) 654-6598

www.qwikchute.com

Warranty does not apply to conditions resulting from:

1. Damage(s) and/or costs associated with shipping and or/ transportation.
2. Lack of normal maintenance, adjustments, or service required for regular use of the product.
3. Modifications, service/repairs, parts or components not authorized by GTM.

GTM shall not be liable for any special, consequential, direct or indirect damages, and expressly states there are no implied warranties. Some states do not allow limitation of incidental or consequential damages, accordingly the above limitations and exclusions may not apply to you. This warranty provides you with specific legal rights which may vary from state to state.

IT IS THE OWNERS RESPONSIBILITY TO PROPERLY COMPLETE AND MAIL THE WARRANTY REGISTRATION CARD.

PROOF OF PURCHASE AND REGISTRATION WILL BE REQUIRED IN ORDER TO OBTAIN WARRANTY SERVICE.

WARRANTY REGISTRATION CARD

Name of Purchaser: _____

Street Address / P.O. Box: _____

City: _____ State: _____ Zip Code: _____

Model Number: _____ PURCHASE DATE: _____|_____|_____

Dealer Name: _____

Street Address: _____

City: _____ State: _____ Zip Code: _____

Customer Received: Operators Manual () Safety Instructions () Demonstration ()

Customers Signature

Date