

NQD-FSICD48 KIT CONTENTS. INSPECTED BY:_____

BASE PLATE- **(MINI-04)** STANDARD MINI

DOOR BAR- **(MINI-05)** STANDARD MINI

HANDLE PIVOT- **(MINI-15)** STANDARD MINI

HANDLE- **(MINI-21)** STANDARD MINI

FLIPPER- **YES**

DOOR- **NQD-FSICD48**

BRACKETS- **(2) UB-01 (2.187" TALL INSTALLED)**

HARDWARE KIT: **H** CONTENTS:

(2) 5/16 -18 X 1 GR 5 HEX HEAD BOLT


(4) 5/16 SAE or 1/4 USS WASHER

(2) 5/16-18 NYLOC NUT

(1) NQD-097-SPRING

(1) SPRING PULLER

SEE STEPS 1 THROUGH 4 FOR QWIKCHUTE INSTALLATION

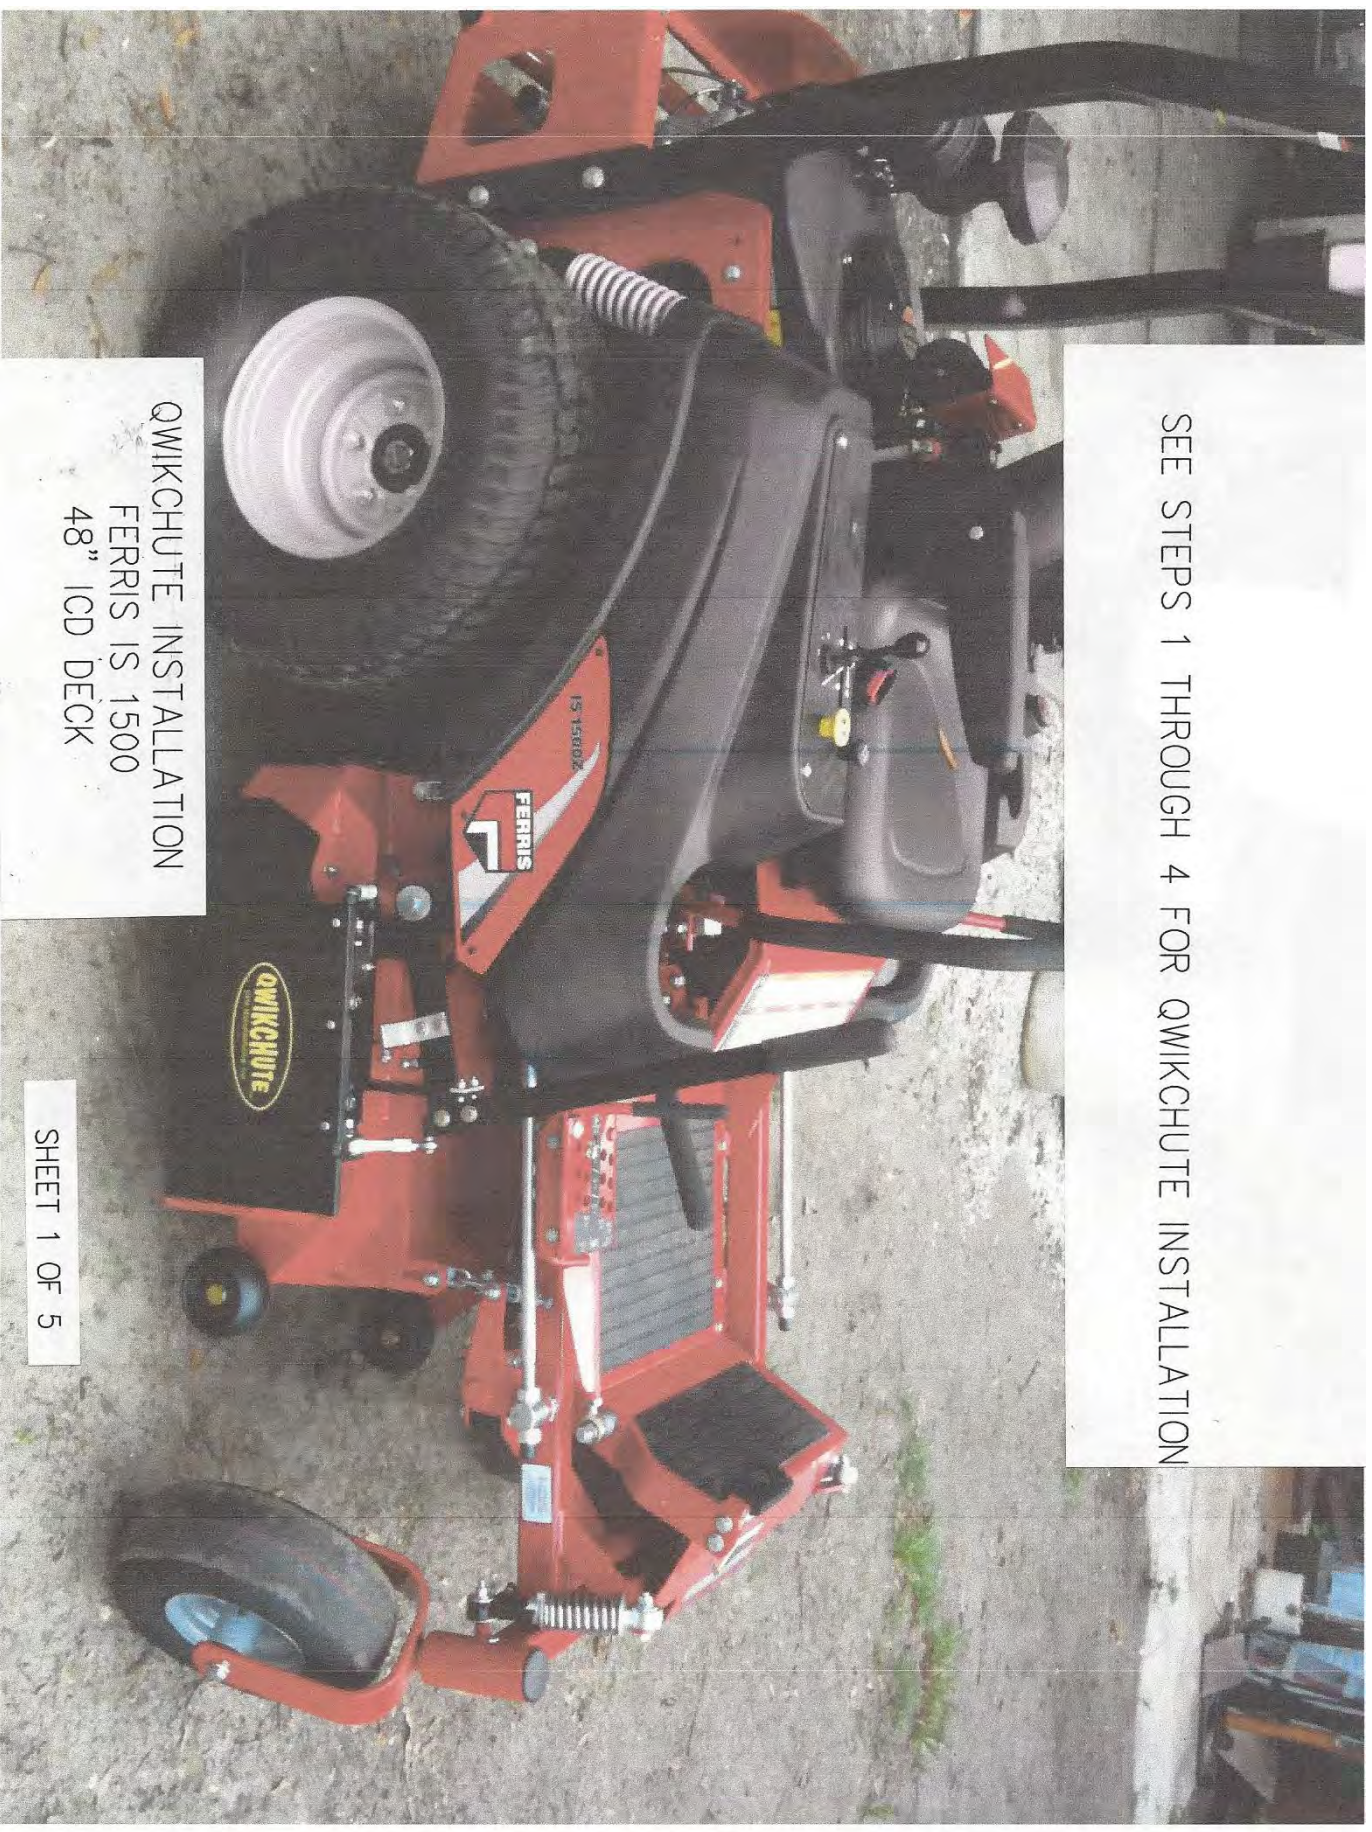


QWIKCHUTE INSTALLATION
FERRIS IS 1500
48" ICD DECK

SHEET 1 OF 5

STEP 1

A REMOVE FACTORY CHUTE AND LAYOUT HOLE PATTERN AS SHOWN FOR MOUNTING THE QWIKCHUTE TO THE DECK.

B CENTER PUNCH AND DRILL $\frac{3}{8}$ " DIA. THRU DECK 2 PLACES

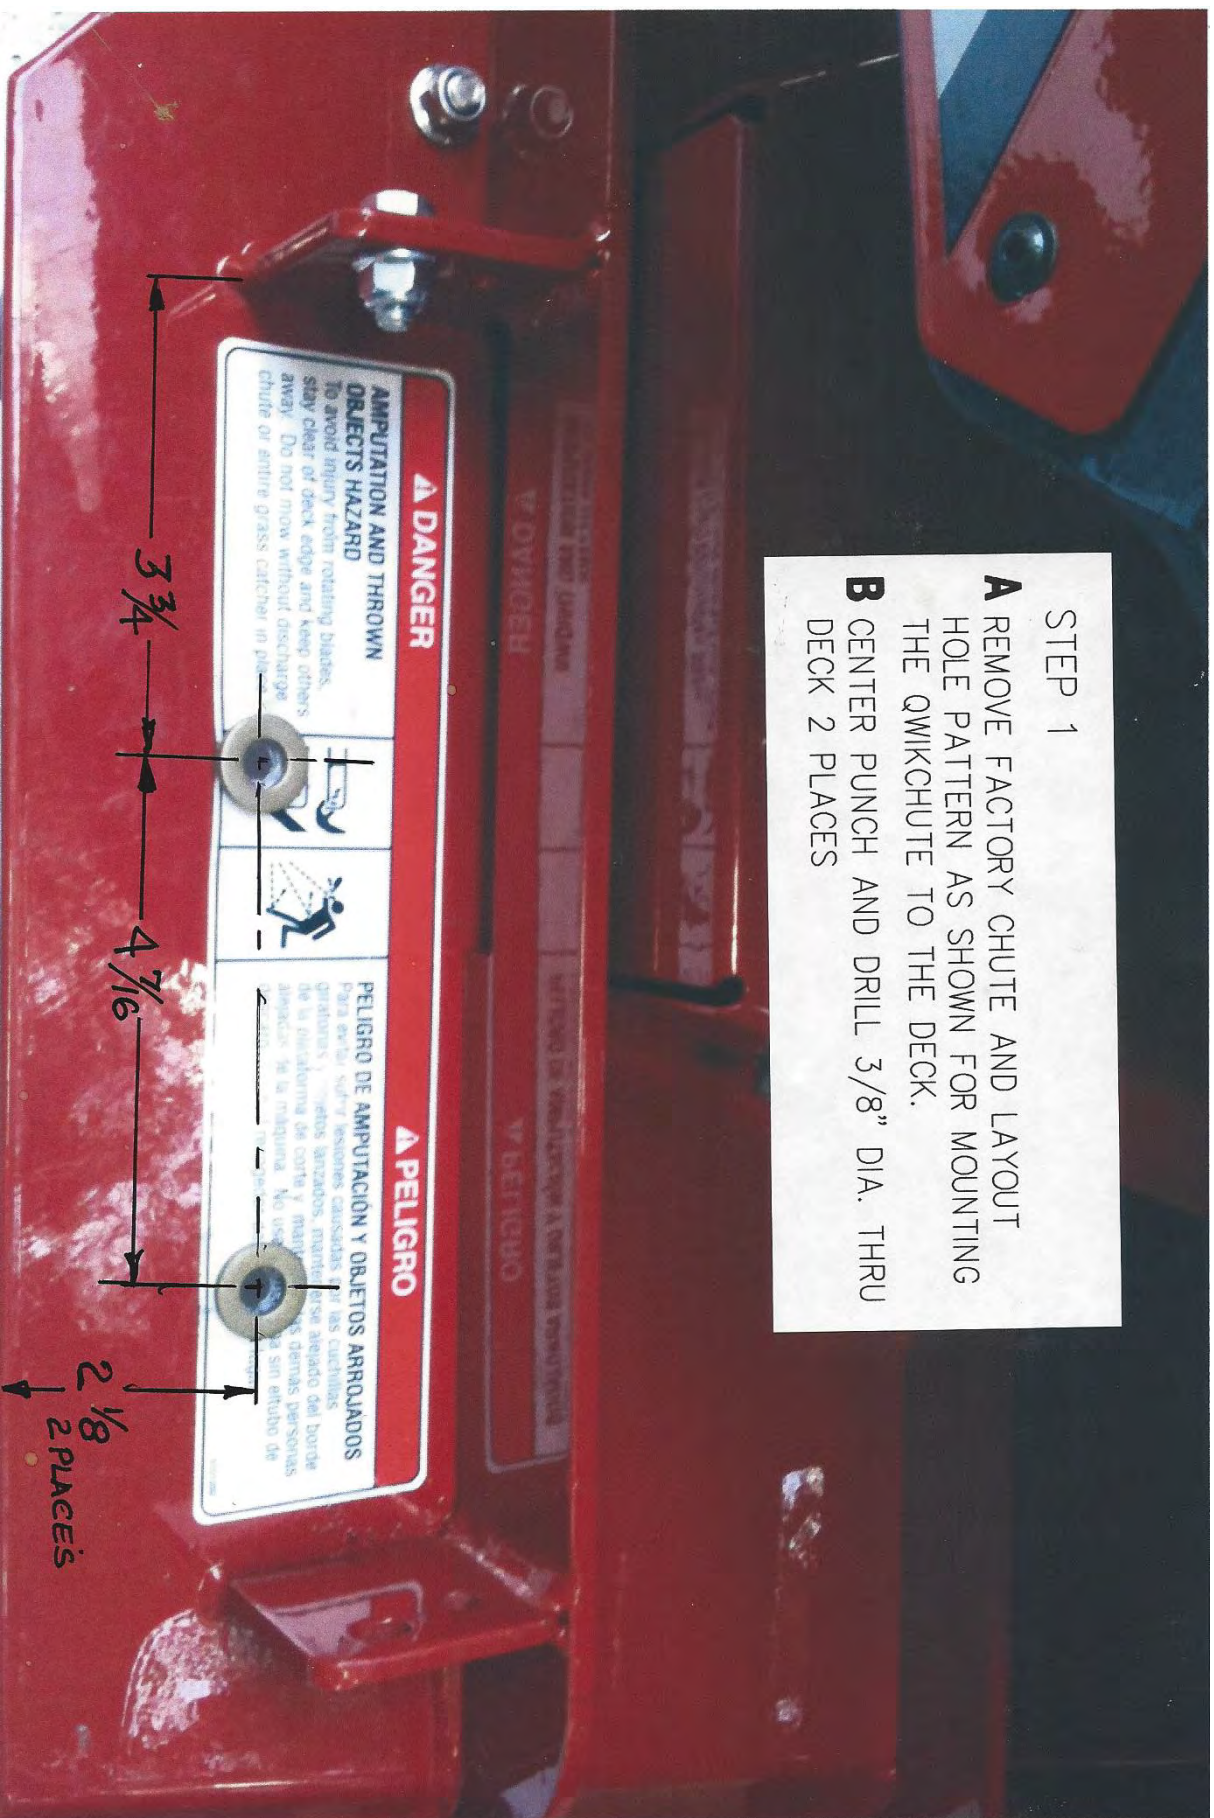

STEP 2

A INSTALL QWIKCHUTE MOUNTING U-BRACKETS AS SHOWN WITH THE TOP FACE OF THE U-BRACKET SLOPING TOWARD THE CENTER OF MOWER DECK

B BOLT U-BRACKETS TO DECK USING 5/16 X 1" LG HEX BOLTS, NUTS AND WASHERS SUPPLIED WITH KIT BOLTS TO BE SNUG TIGHT ONLY SO THAT ADJUSTMENT CAN BE MADE ONCE QWIKCHUTE IS MOUNTED TO BRACKETS AND DOOR IS FITTED TIGHT AGAINST DISCHARGE FACE


QWIKCHUTE INSTALLATION
FERRIS IS 1500
48" ICD DECK

STEP 3

A INSTALL QWIKCHUTE TO MOUNTING U-BRACKETS AS SHOWN WITH THE DOOR FACE TIGHT AGAINST MOWER DISCHARGE FACE


B MOUNT QWIKCHUTE TO U-BRACKETS USING 5/16 X 1" LG HEX BOLTS, NUTS AND WASHERS SUPPLIED WITH KIT BOLTS TO BE SNUG TIGHT ONLY UNTIL DOOR IS FITTED TIGHT TO DISCHARGE FACE, THEN TIGHTEN BOLTS

QWIKCHUTE INSTALLATION
FERRIS IS 1500
48" ICD DECK

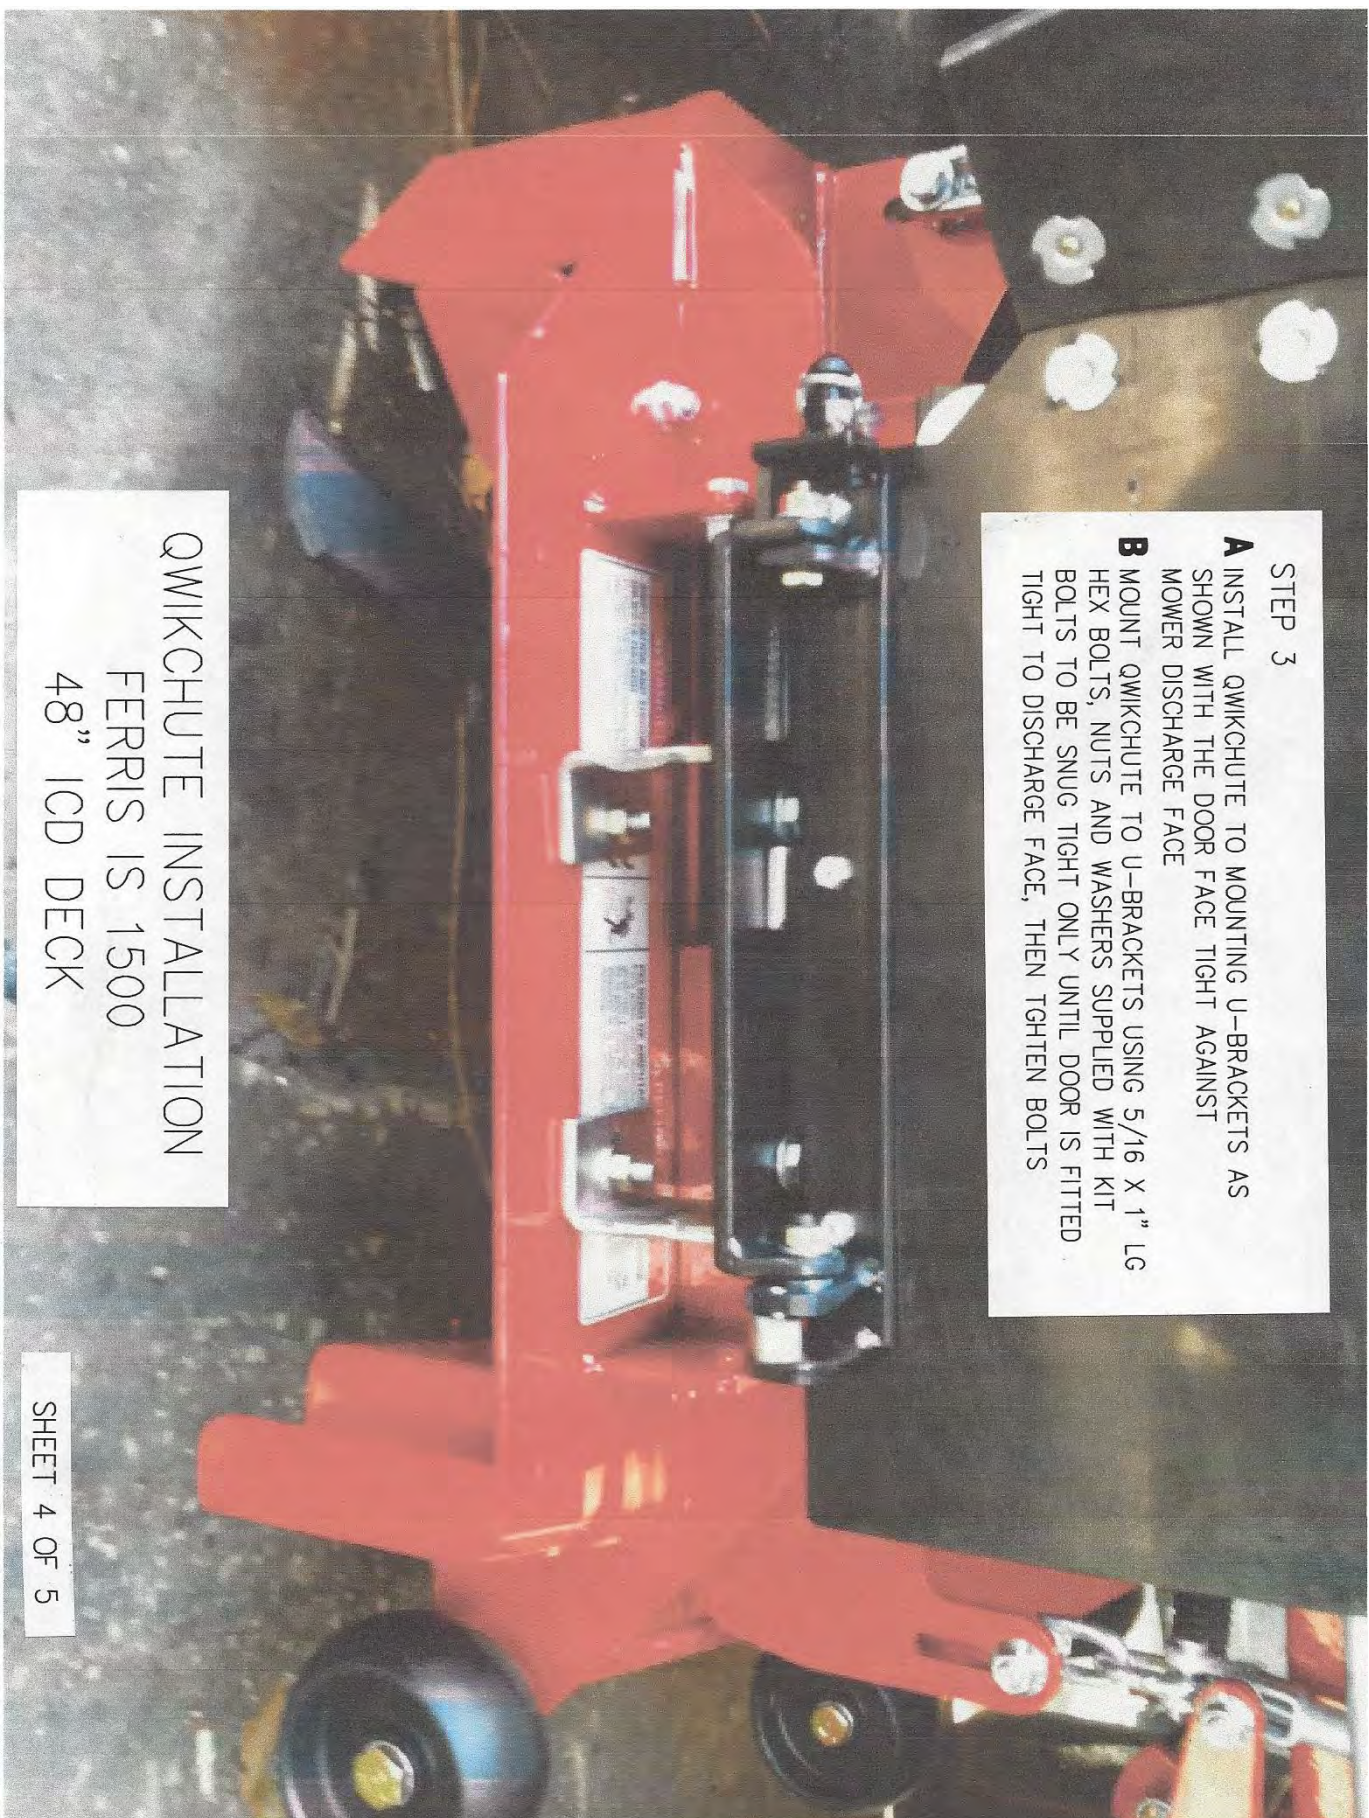

STEP 4

- A** INSTALL QWIKCHUTE HANDLE AS SHOWN USING 5/16 X 1" LG HEX BOLTS, NUTS, FLAT WASHER AND TOOTH WASHERS SUPPLIED
- TOOTH WASHER TO BE INSTALLED BETWEEN FACE OF HANDLE AND LOWER PIVOT BAR TO PROVIDE FRICTION BETWEEN HANDLE LOWER PIVOT BAR .
- B** ADJUST HANDLE AS REQUIRED THEN TIGHTEN.
- C** INSTALL SPRING, SEE SPRING INSTALLTION SHEET.

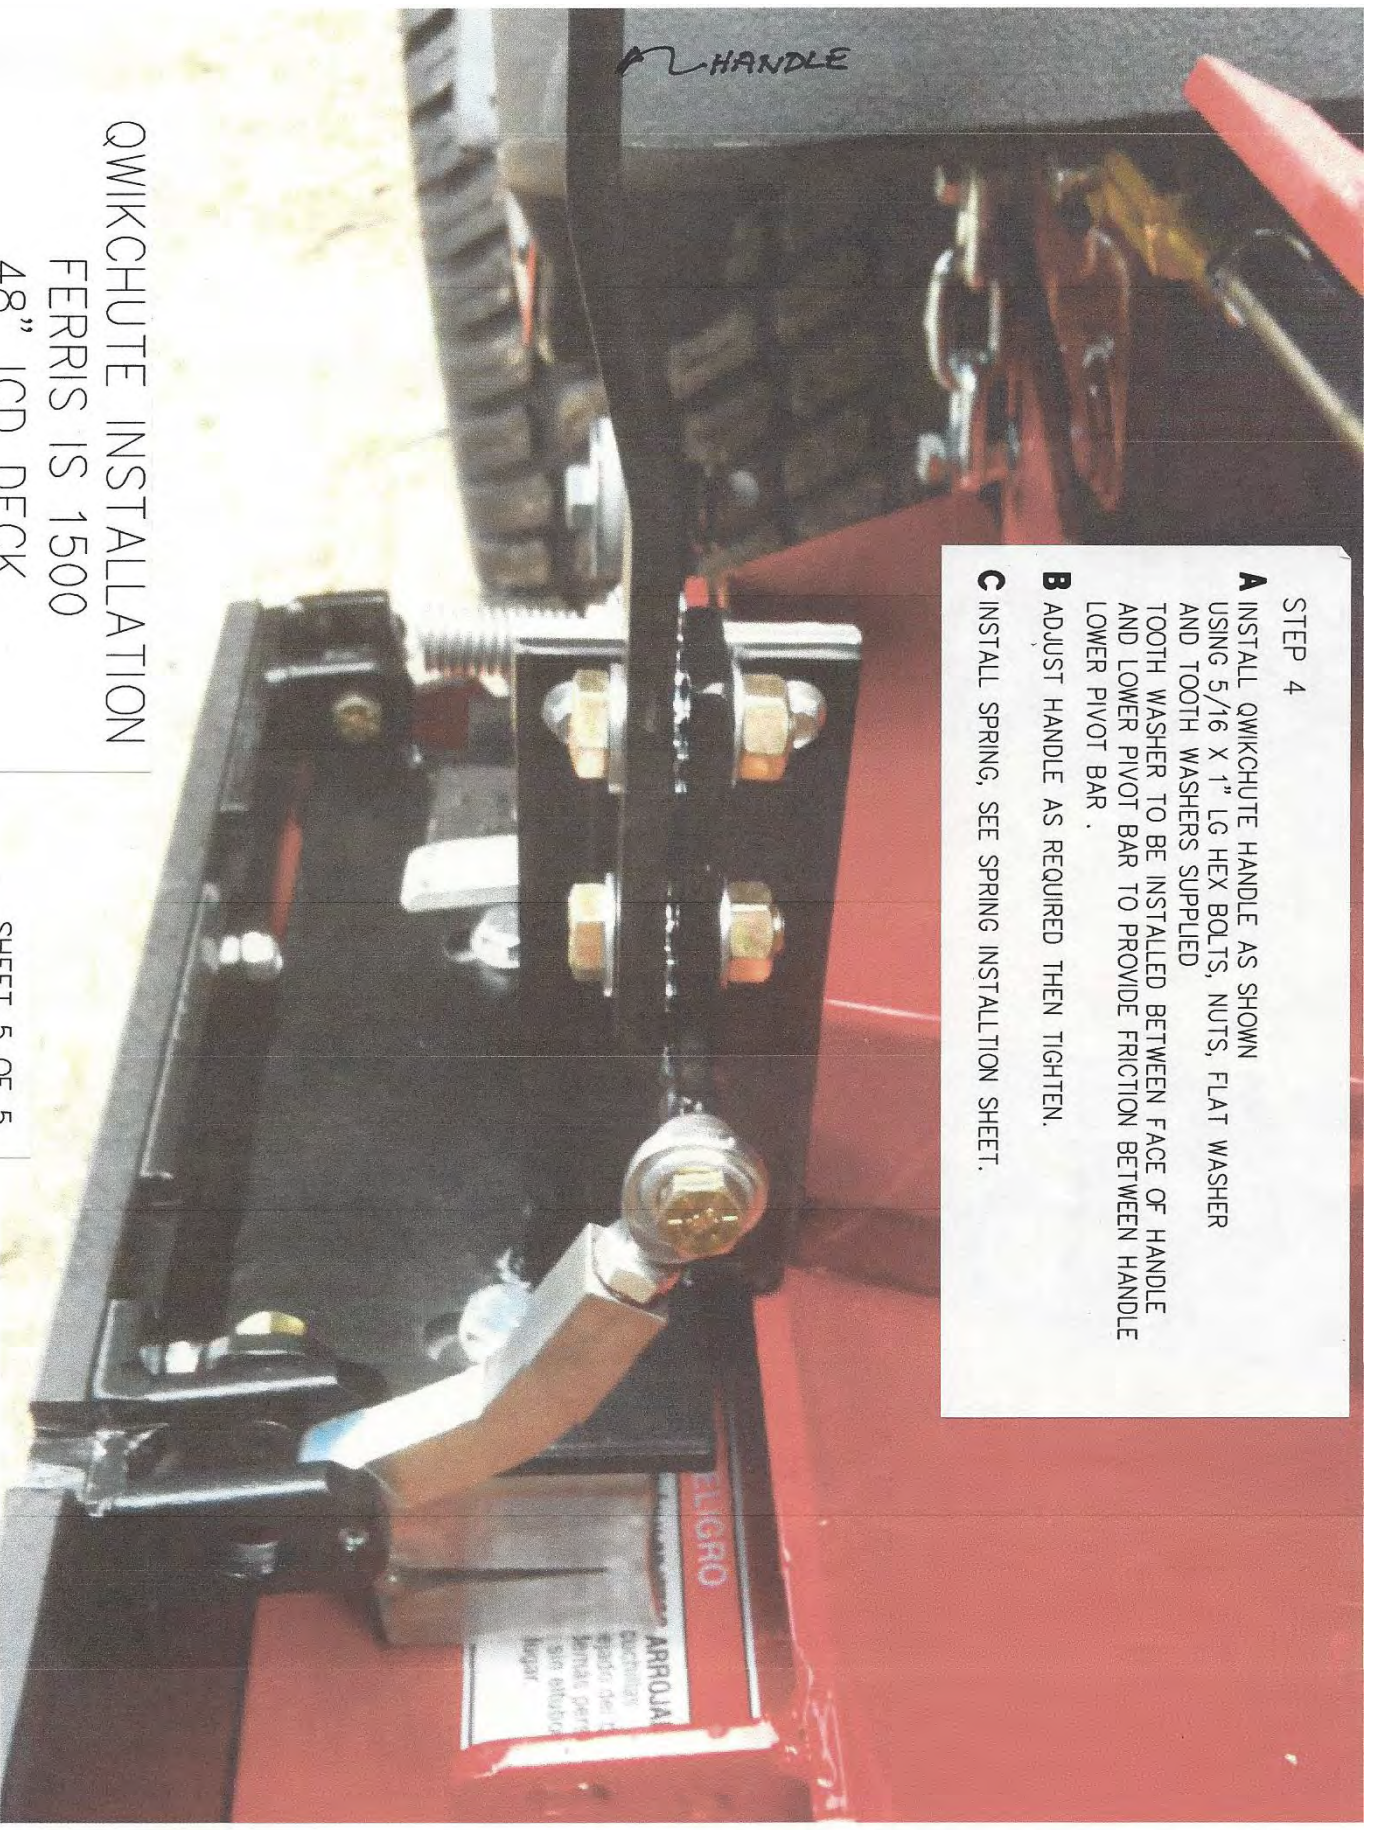


QWIKCHUTE INSTALLATION

FERRIS IS 1500

48" ICD DECK


NQD MINI SERIES SPRING INSTALLATION

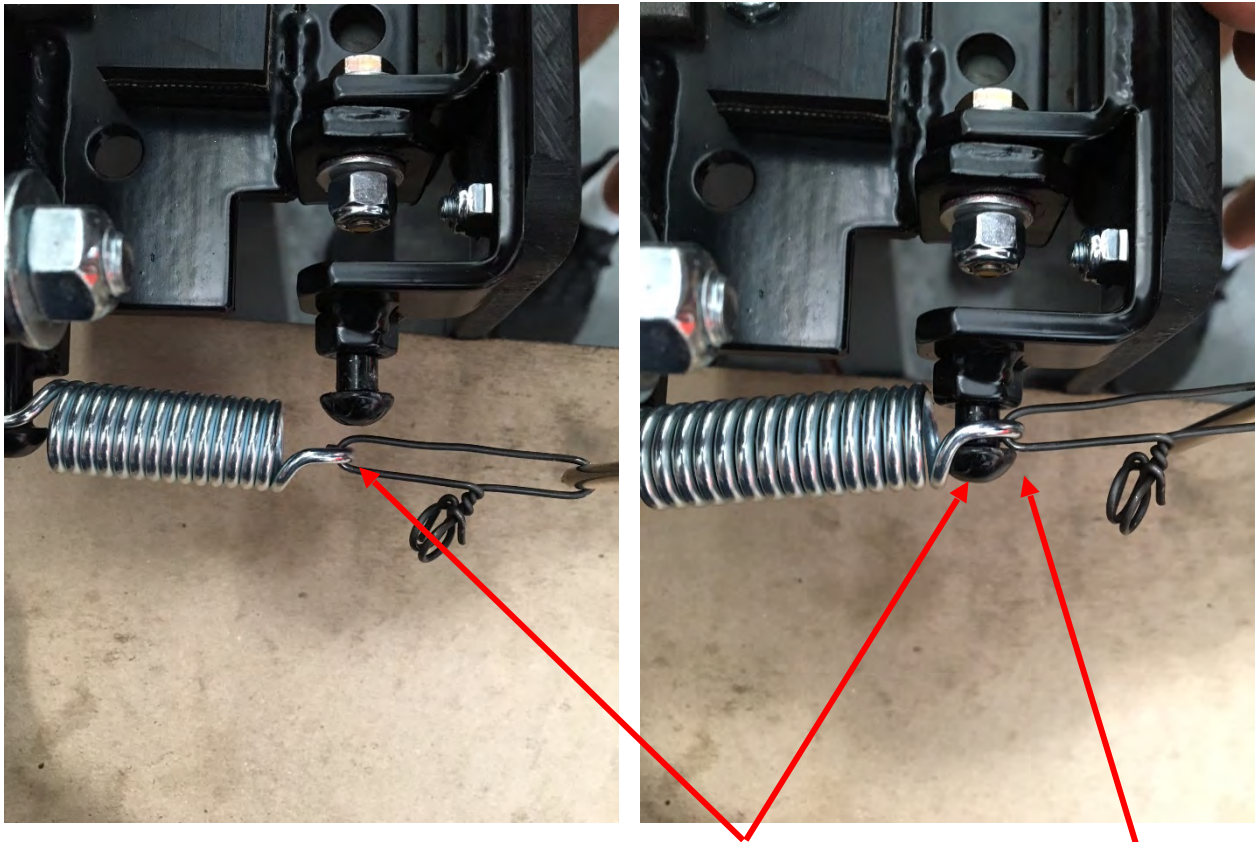

INSTALL SPRING WITH BEND IN HOOK AS SHOWN

SOME UNITS WILL HAVE A THREADED STUD HERE

INSTALL RETAINING LOCK NUT AFTER SPRING IS INSTALLED

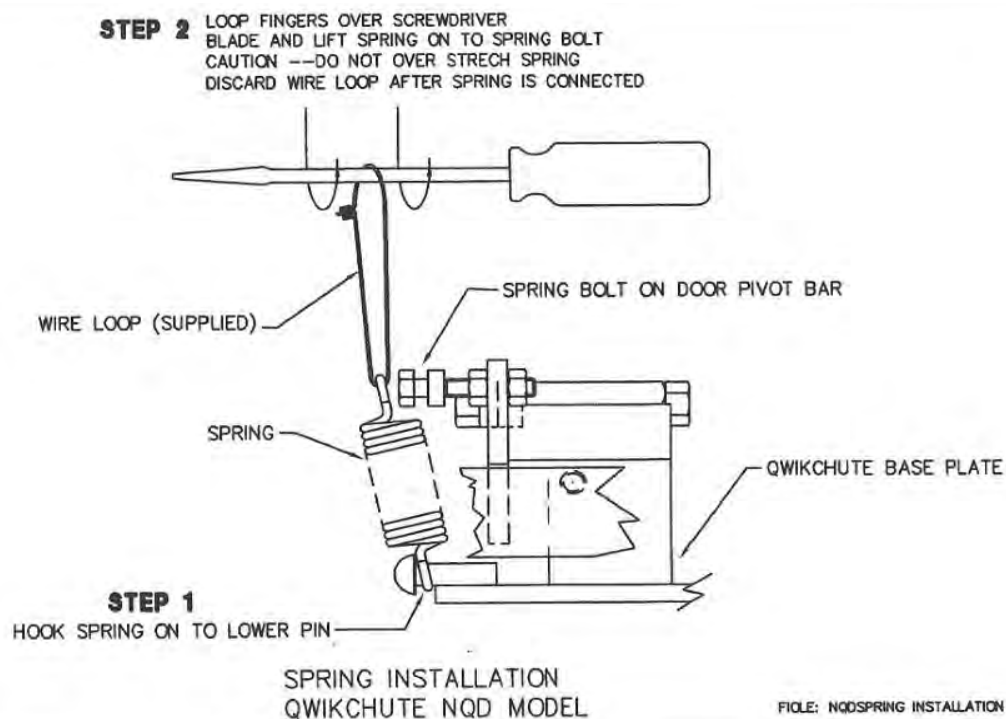

Qwikchute Operating Instructions

Open Fully-move handle away from operator quickly.

Close Fully- move handle toward operator quickly.

Partially Open –from close position move handle away from operator until stay bar swings into position and release handle. To close from partially open position quickly open and then close. (Some models do not have this partial open feature.)

OIL ALL BEARING POINT WEEKLY OR AS NEEDED.

WARRANTY

GTM Manufacturing, Inc. products are warranted to the original purchaser to be free from defects in materials and workmanship for a period of 90 days from the date of purchase.

Any part(s) of GTM products found to be defective within the warranty period shall, at GTM's option, be repaired or replaced without charge.

Warranty consideration is obtained by returning any GTM product/part believed to be defective to GTM Manufacturing, Inc. within the applicable warranty period. **Please call for authorization.**

GTM Manufacturing, Inc.

14350 EASTSIDE ST

GROVELAND, FL. 34736

(407) 654-6598

www.qwikchute.com

Warranty does not apply to conditions resulting from:

1. Damage(s) and/or costs associated with shipping and or/ transportation.
2. Lack of normal maintenance, adjustments, or service required for regular use of the product.
3. Modifications, service/repairs, parts or components not authorized by GTM.

GTM shall not be liable for any special, consequential, direct or indirect damages, and expressly states there are no implied warranties. Some states do not allow limitation of incidental or consequential damages, accordingly the above limitations and exclusions may not apply to you. This warranty provides you with specific legal rights which may vary from state to state.

IT IS THE OWNERS RESPONSIBILITY TO PROPERLY COMPLETE AND MAIL THE WARRANTY REGISTRATION CARD.

PROOF OF PURCHASE AND REGISTRATION WILL BE REQUIRED IN ORDER TO OBTAIN WARRANTY SERVICE.

WARRANTY REGISTRATION CARD

Name of Purchaser: _____

Street Address / P.O. Box: _____

City: _____ State: _____ Zip Code: _____

Model Number: _____ PURCHASE DATE: _____|_____|_____

Dealer Name: _____

Street Address: _____

City: _____ State: _____ Zip Code: _____

Customer Received: Operators Manual () Safety Instructions () Demonstration ()

Customers Signature

Date