

BASE PLATE- HUSQ-05

DOOR BAR- STANDARD (NQD-080)

HANDLE PIVOT- STANDARD (NQD-075)

HANDLE- STANDARD (NQD-092)

DOOR- NQD-HV500-54

CENTER DEFLECTOR- STANDARD (NQD-100)

END DEFLECTOR- FULL (NQD-121-1)

BRACKETS- (2) NQD-118 (1 ¾" TALL BRACKETS) /INSTALLED

HARDWARE KIT- CPW CONTENTS:

- (4) 1/4-20 X 7/8 SOCKET HEAD BOLT**
- (4) 1/4-20 GR 8 NUTS**
- (4) 1/4-20 X 1 GR 8 HEX HEAD BOLT**
- (8) 1/4 SAE WASHER**
- (4) 1/4-20 NYLOC NUT**
- (1) NQD-097-SPRING**
- (1) SPRING PULLER**
- (4) 5/16 USS WASHER**

BAFFLE/SUBPLATE- SC-16 (DECK BAFFLE)

QWIKCHUTE KIT NQD-HV500-54


STEP 1

REMOVE FACTORY CHUTE AND PLACE QWIKCHUTE ON DECK WITH DECK BAFFLE AS SHOWN ON SHEET 2. CLOSE DOOR ON QWIKCHUTE POSITIONING IT SO THAT REAR CORNER OF DOOR AND BAFFLE SEAL THE DECK OPENING (SEE FIGURE B). USE HOLES SHOWN IN FIGURE A AS A TEMPLATE MARK HOLE WITH MARKER. WHILE HOLDING DOOR AGAINST THE FACE OF OPENING. REMOVE UNIT CENTER PUNCH AND DRILL FOUR 1/4" HOLES. MOUNT QWIKCHUTE TO DECK USING (4) 1/4" X 1-1/4" BOLTS WITH WASHERS AND NUTS AS SUPPLIED. HOLD DOOR AGAINST FACE WHEN TIGHTENING HARDWARE.

STEP 2 INSTALL SPRING (SEE INSTALLATION SHEET)

STEP 3 INSTALL HANDLE (SEE INSTALLATION SHEET)

FIGURE A

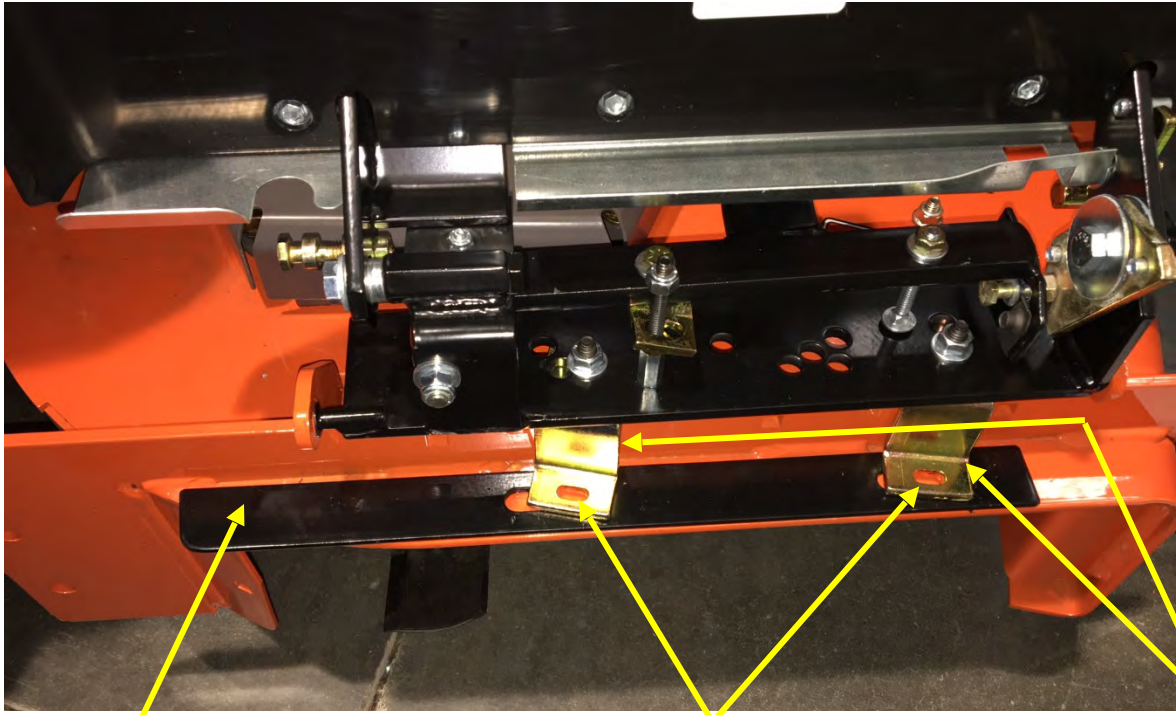


DECK BAFFLE

MOUNTING HOLES

MOUNTING BRACKETS

THE MOUNTING BRACKETS WILL BE INSTALLED ON THE QWIKCHUTE. THIS VIEW IS TO SHOW CORRECT PLACEMENT ON DECK

FIGURE B


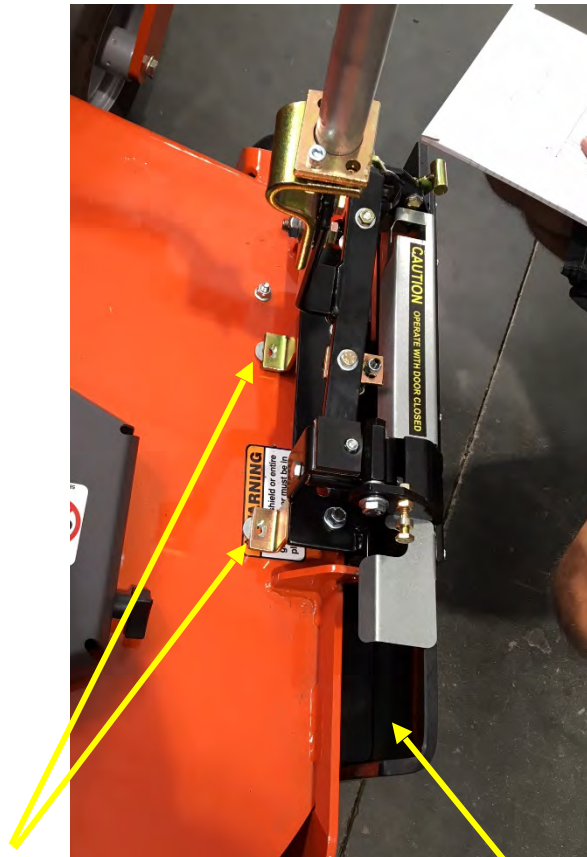


5/16 USS SPACER WASHERS
UNDER MOUNTING BRKT
OPPOSITE SIDE OF DECK BAFFLE

DECK BAFFLE TO FIT ALONG
FACE OF DOOR AND TIGHT IN
CORNER AS SHOWN

SPRING INSTALLATION QWIKCHUTE NQD MODEL

STEP 2 LOOP FINGERS OVER SCREWDRIVER
BLADE AND LIFT SPRING ON TO SPRING BOLT
CAUTION --DO NOT OVER STRECH SPRING
DISCARD WIRE LOOP AFTER SPRING IS CONNECTED

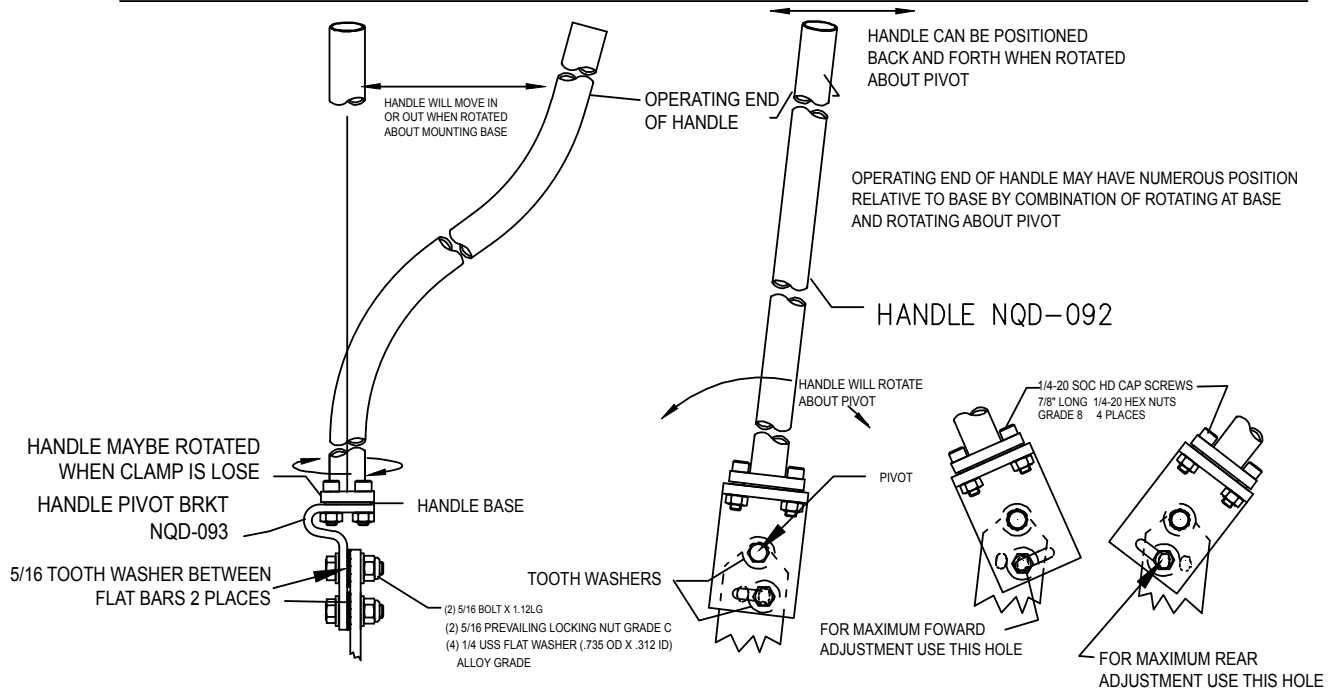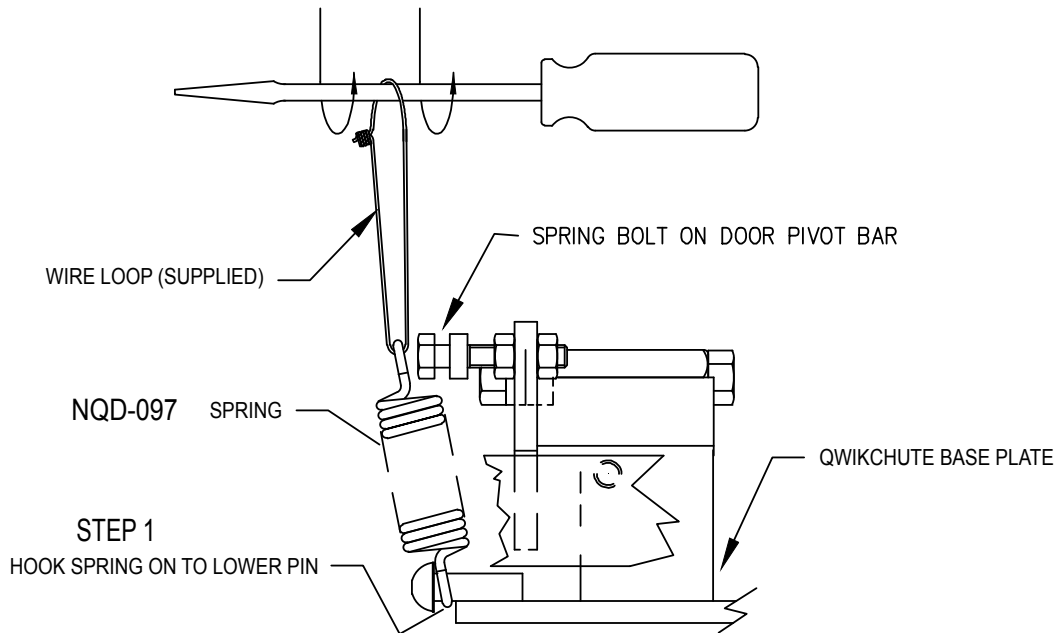

HANDLE INSTALLATION AND ADJUSTMENT

QWIKCHUTE OPERATING PRECEDURE

OPEN FULLY- move handle away from operator quickly.

CLOSE FULLY- move handle toward operator quickly.

PARTIALLY OPEN- from close position move handle away from operator until stay bar swings into position and release handle. To close from partially open position, quickly open and then close.

(some models do not have partial open feature.)

OIL ALL BEARING POINTS WEEKLY OR AS NEEDED.

WARRANTY

GTM Manufacturing, Inc. products are warranted to the original purchaser to be free from defects in materials and workmanship for a period of 90 days from the date of purchase.

Any part(s) of GTM products found to be defective within the warranty period shall, at GTM's option, be repaired or replaced without charge.

Warranty consideration is obtained by returning any GTM product/part believed to be defective to GTM Manufacturing, Inc. within the applicable warranty period. **Please call for authorization.**

GTM Manufacturing, Inc.
14350 EASTSIDE ST
GROVELAND, FL. 34736
(407) 654-6598
www.qwikchute.com

Warranty does not apply to conditions resulting from:

1. Damage(s) and/or costs associated with shipping and or/ transportation.
2. Lack of normal maintenance, adjustments, or service required for regular use of the product.
3. Modifications, service/repairs, parts or components not authorized by GTM.

GTM shall not be liable for any special, consequential, direct or indirect damages, and expressly states there are no implied warranties. Some states do not allow limitation of incidental or consequential damages, accordingly the above limitations and exclusions may not apply to you. This warranty provides you with specific legal rights which may vary from state to state.

IT IS THE OWNERS RESPONSIBILITY TO PROPERLY COMPLETE AND MAIL THE WARRANTY REGISTRATION CARD.

PROOF OF PURCHASE AND REGISTRATION WILL BE REQUIRED IN ORDER TO OBTAIN WARRANTY SERVICE.

WARRANTY REGISTRATION CARD

Name of Purchaser: _____

Street Address / P.O. Box: _____

City: _____ State: _____ Zip Code: _____

Model Number: _____ PURCHASE DATE: _____|_____|_____

Dealer Name: _____

Street Address: _____

City: _____ State: _____ Zip Code: _____

Customer Received: Operators Manual () Safety Instructions () Demonstration ()

Customers Signature

Date