


NQD-WLC48 KIT CONTENTS. INSPECTED BY:_____

BASE PLATE- MODIFIED (WL-02)

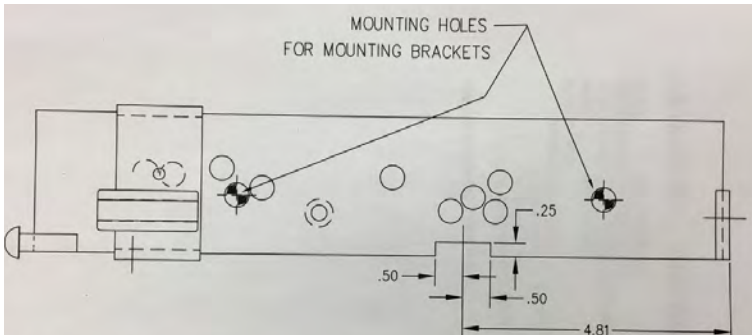

DOOR BAR- STANDARD (NQD-080)

HANDLE PIVOT- STANDARD (NQD-075)


HANDLE- STANDARD (NQD-092)

DOOR- NQD-WLC48

CENTER DEFLECTOR- STANDARD (NQD-100)

END DEFLECTOR- CUSTOM (NQD-121-3)


BRACKETS- (2) UB-01 (2 3/16" TALL U-BRACKETS) /INSTALLED

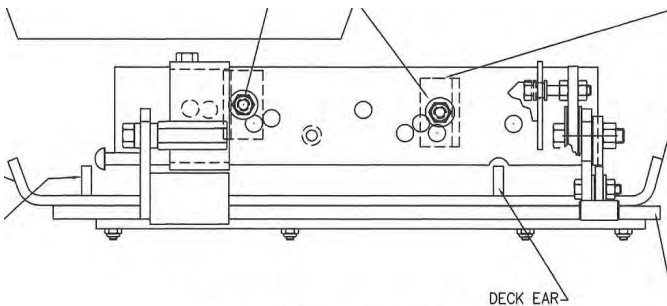

HARDWARE KIT- A CONTENTS:

- (4) 1/4-20 X 7/8 SOCKET HEAD BOLT
- (4) 1/4-20 GR 8 NUTS
- (2) 5/16-18 X 1 GR 5 HEX HEADBOLT
- (4) 5/16 SAE **or** 1/4 USS WASHER
- (2) 5/16-18 NYLOC NUT
- (1) NQD-097-SPRING
- (1) SPRING PULLER

USE THESE HOLE TO MOUNT
THE QWIKCHUTE TO DECK
MOUNTING BOLTS 5/16 X 1" LONG
2 PLACES

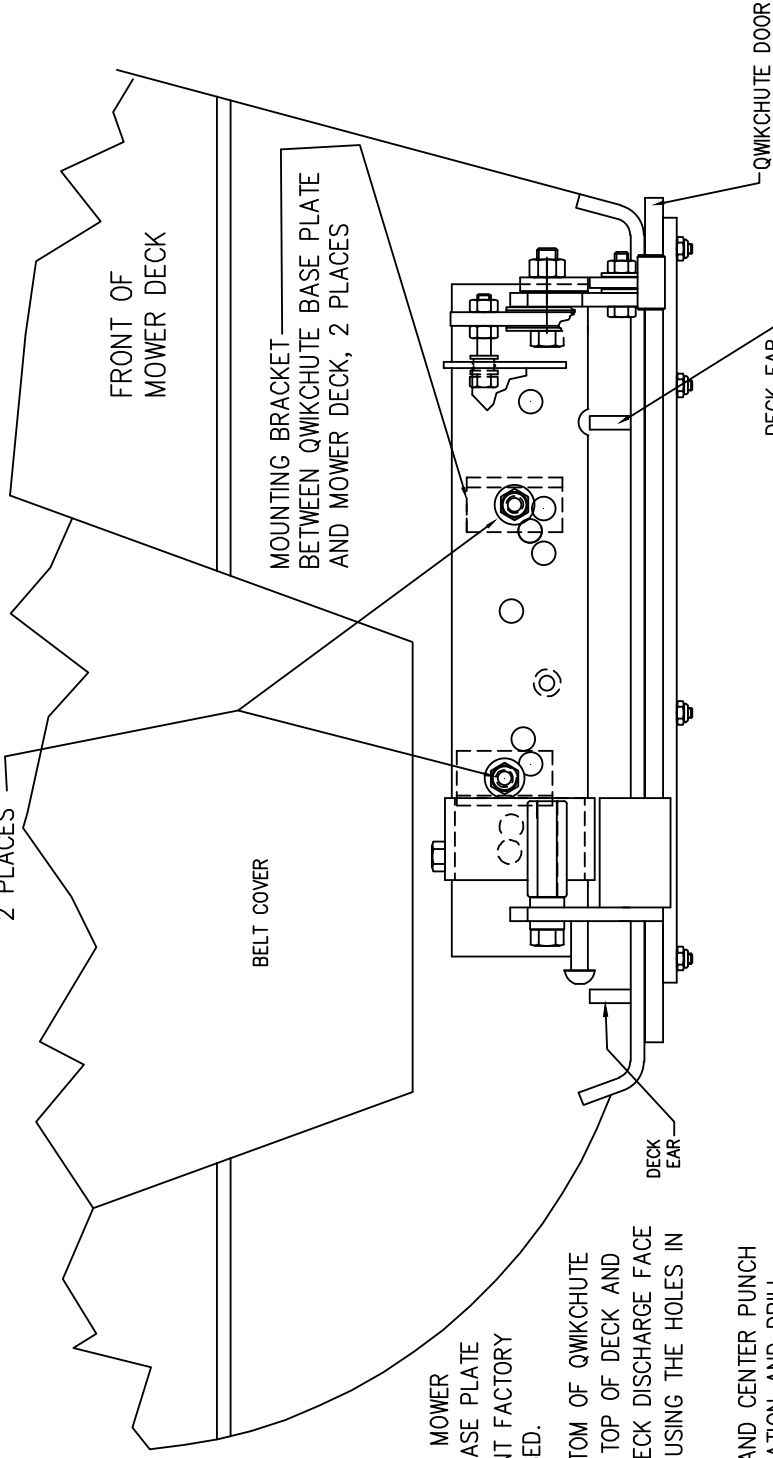

STEP 1

A REMOVE FACTORY CHUTE

STEP 2

- A POSITION QWIKCHUTE ASSEMBLY ON MOWER DECK WITH NOTCH IN QWIKCHUTE BASE PLATE POSITIONED OVER EARS THAT MOUNT FACTORY DISCHARGE CHUTE AND DOOR CLOSED.
- B WITH MOUNTING BRACKETS ON BOTTOM OF QWIKCHUTE BASE PLATE AND SITTING FIRM ON TOP OF DECK AND QWIKCHUTE DOOR TIGHT AGAINST DECK DISCHARGE FACE
- C MARK DECK FOR MOUNTING HOLES USING THE HOLES IN MONTING BRACKET AS TEMPLATE.
- D REMOVE QWIKCHUTE FROM MOWER AND CENTER PUNCH THE MARKED MOUNTING HOLES LOCATION AND DRILL 3/8" DIA THRU DECK, 2 PLACES.

E REPOSITION QWIKCHUTE ON MOWER DECK WITH MT. BRACKETS AND INSTALL MOUNTING HARDWARE (BOLT 5/16 UNC X 1" LONG WITH FLAT WASHERS AND NUT)

THIGTEN MOUNTING HARDWARE WITH QWIKCHUTE DOOR TIGHT AGAINST DISCHARGE FACE

STEP 3

- A INSTALL SPRING (SEE SPRING INSTALLATION SHEET)
- B INSTALL HANDLE (SEE HANDLE INSTALLATION SHEET)

QWIKCHUTE INSTALLATION
WORLDLAWN 48" COBRA



NQD-WLC48

1-8-15

FILE: WORLD LAWN NQD

SPRING INSTALLATION QWIKCHUTE NQD MODEL

STEP 2 LOOP FINGERS OVER SCREWDRIVER
BLADE AND LIFT SPRING ON TO SPRING BOLT
CAUTION --DO NOT OVER STRECH SPRING
DISCARD WIRE LOOP AFTER SPRING IS CONNECTED

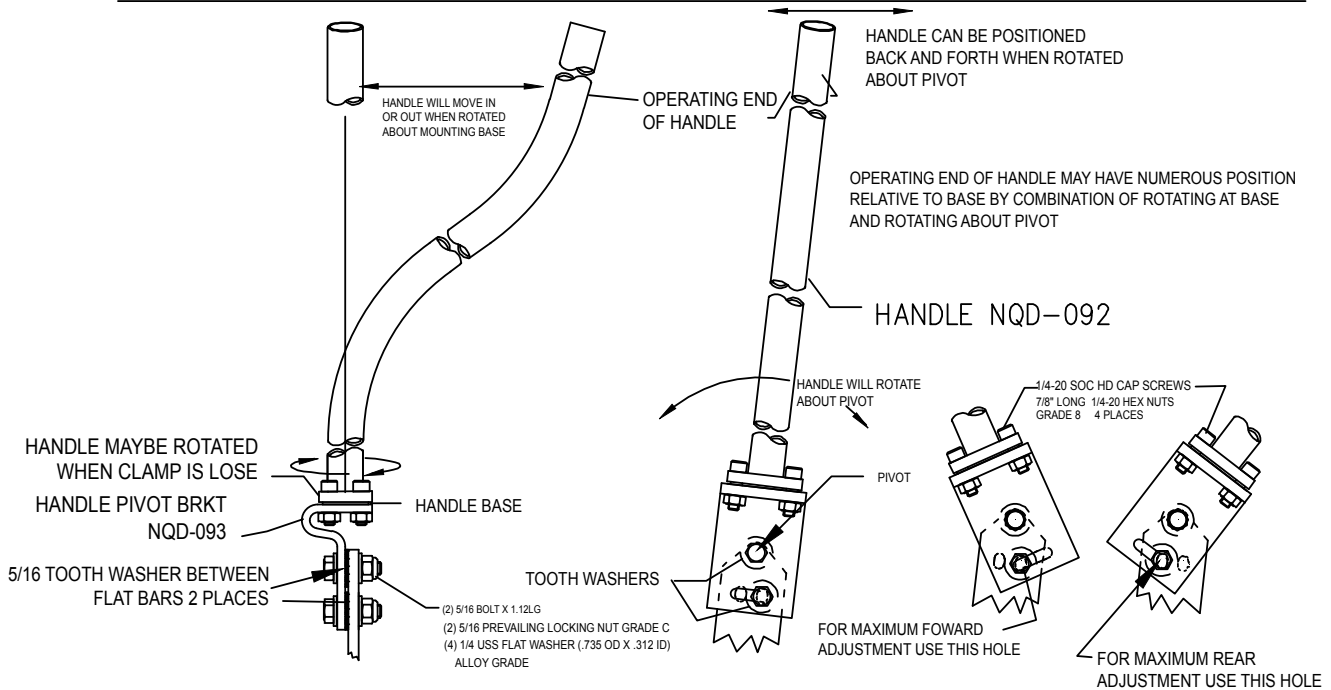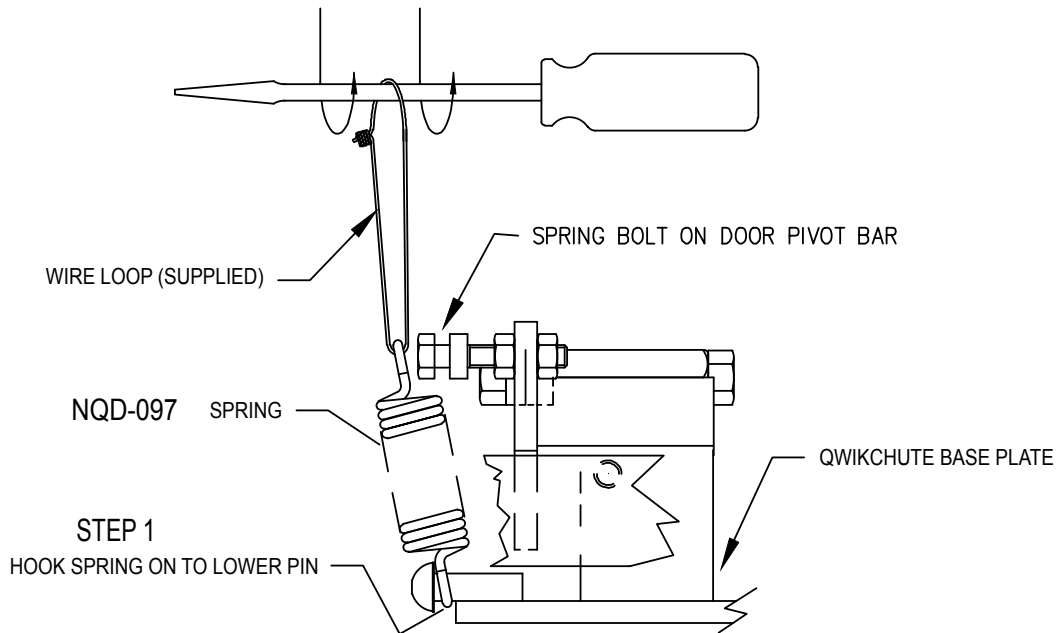

HANDLE INSTALLATION AND ADJUSTMENT

QWIKCHUTE OPERATING PRECEDURE

OPEN FULLY- move handle away from operator quickly.

CLOSE FULLY- move handle toward operator quickly.

PARTIALLY OPEN- from close position move handle away from operator until stay bar swings into position and release handle. To close from partially open position, quickly open and then close.

(some models do not have partial open feature.)

OIL ALL BEARING POINTS WEEKLY OR AS NEEDED.

WARRANTY

GTM Manufacturing, Inc. products are warranted to the original purchaser to be free from defects in materials and workmanship for a period of 90 days from the date of purchase.

Any part(s) of GTM products found to be defective within the warranty period shall, at GTM's option, be repaired or replaced without charge.

Warranty consideration is obtained by returning any GTM product/part believed to be defective to GTM Manufacturing, Inc. within the applicable warranty period. **Please call for authorization.**

GTM Manufacturing, Inc.

14350 EASTSIDE ST

GROVELAND, FL. 34736

(407) 654-6598

www.qwikchute.com

Warranty does not apply to conditions resulting from:

1. Damage(s) and/or costs associated with shipping and or/ transportation.
2. Lack of normal maintenance, adjustments, or service required for regular use of the product.
3. Modifications, service/repairs, parts or components not authorized by GTM.

GTM shall not be liable for any special, consequential, direct or indirect damages, and expressly states there are no implied warranties. Some states do not allow limitation of incidental or consequential damages, accordingly the above limitations and exclusions may not apply to you. This warranty provides you with specific legal rights which may vary from state to state.

IT IS THE OWNERS RESPONSIBILITY TO PROPERLY COMPLETE AND MAIL THE WARRANTY REGISTRATION CARD.

PROOF OF PURCHASE AND REGISTRATION WILL BE REQUIRED IN ORDER TO OBTAIN WARRANTY SERVICE.

WARRANTY REGISTRATION CARD

Name of Purchaser: _____

Street Address / P.O. Box: _____

City: _____ State: _____ Zip Code: _____

Model Number: _____ PURCHASE DATE: _____|_____|_____

Dealer Name: _____

Street Address: _____

City: _____ State: _____ Zip Code: _____

Customer Received: Operators Manual () Safety Instructions () Demonstration ()

Customers Signature

Date